

S7 Series Switches

Datasheet

Version: V1.2
 Release Date: 2026/3

Product Overview

The S7 Series Switch features high-performance Layer 3 aggregation and data center switches powered by a next-generation MAC SoC. Leveraging advanced hardware processes, the series provides full Layer 3 networking capabilities for high-speed enterprise and operator environments



Highlight Features

- Unified Converged Core: Full MPLS (L2/L3 VPN) stack to support multi-tenant, converged network architectures.
- Carrier-Grade Reliability: MLAG support for Active-Active redundancy, providing device-level failover and hitless upgrades.
- Data Center Fabric: Hardware-accelerated VXLAN with BGP-EVPN control plane for scalable overlay networks.
- Line-Rate Security: MACsec (AES-CMAC) encryption for secure, hardware-based switch-to-switch link protection.
- Nanosecond Precision: IEEE 1588 PTP (Precision Timing Protocol) for time-sensitive synchronization.
- Advanced Routing: Comprehensive L2/IPv4/IPv6 stack including OSPF, BGP, and PIM (Multicast).

The S7 Series switches provide redundant hot-swappable power supplies (AC and DC are both available) and 4 bays with Field replaceable fan modules. Generally, airflow of this series is front to rear (AFO), but a customization of rear to front (AFI) airflow is also acceptable.

Feasible PSU and airflow

Items	AC	DC	AFO	AFI	Power Input	FAN
S7314CH-4N-EI	○	○	○	○	2	2
S7224N-8C	○	○	○	○	2	4

Feasible PSU and airflow

S7248N-4C-EI	○	○	○	○	2	4
S7248N-4C-SI	○	X	○	X	1	4
S7148X-8C-EI	○	○	○	○	2	4
S7148X-8C-SI	○	X	○	X	1	4
S7132X16N-4C-EI	○	○	○	○	2	4
S7132X16N-4C-SI	○	X	○	X	1	4
S7124X-8C-EI	○	○	○	○	2	4
S7124X-8C-SI	○	X	○	X	1	4

Family of the S7 Series switches

Models	Ethernet Ports	Management	PSU 1/PSU 2	Cooling
S7314CH-4N-EI	14 x 40G/100G QSFP28 + 4x 1G/10G/25G SFP28	Console: RJ45 to RS232 Ethernet: 1G Port Storage: USB	300W / 300W CRPS	2 x Fan Modules (front-to-back airflow)
S7224N-8C	24 x 1G/10G/25G SFP28 + 14 x 40G/100G QSFP28	Console: RJ45 to RS232 Ethernet: 1G Port Storage: USB	350W / 350W CRPS	4 x Fan Modules (front-to-back airflow)
S7248N-4C-EI	48 x 1G/10G/25G SFP28, 4 x 40G/100G QSFP28	Console: RJ45 to RS232 Ethernet: 1G Port Storage: USB	550W / 550W CRPS	4 x Fan Modules (front-to-back airflow)
S7248N-4C-SI	48 x 1G/10G/25G SFP28, 4 x 40G/100G QSFP28	Console: RJ45 to RS232 Ethernet: 1G Port Storage: USB	Fixed single power supply	4 x fixed fans (front-to-back airflow)
S7148X-8C-EI	48 x 1G/10G SFP+ + 8 x 40G/100G QSFP28	Console: RJ45 to RS232 Ethernet: 1G Port Storage: USB	550W / 550W CRPS	4 x Fan Modules (front-to-back airflow)
S7148X-8C-SI	48 x 1G/10G SFP+ + 8 x 40G/100G QSFP28	Console: RJ45 to RS232 Ethernet: 1G Port Storage: USB	Fixed single power supply	4 x fixed fans (front-to-back airflow)

Models	Ethernet Ports	Management	PSU 1/PSU 2	Cooling
S7132X16N-4C-EI	32 x 1G/10G SFP+ + 16 x 1G/10G/25G SFP28+ + 4 x 40G/100G QSFP28	Console: RJ45 to RS232 Ethernet: 1G Port Storage: USB	550W / 550W CRPS	4 x Fan Modules (front-to-back airflow)
S7132X16N-4C-SI	32 x 1G/10G SFP+ + 16 x 1G/10G/25G SFP28+ + 4 x 40G/100G QSFP28	Console: RJ45 to RS232 Ethernet: 1G Port Storage: USB	Fixed single power supply	4 x fixed fans (front-to-back airflow)
S7124X-8C-EI	24 x 10G SFP+ + 8 x 100G QSFP 28	Console: RJ45 to RS232 Ethernet: 1G Port Storage: USB	350W / 350W CRPS	2 x Fan Modules (front-to-back airflow)
S7124X-8C-SI	24 x 10G SFP+ + 8 x 100G QSFP 28	Console: RJ45 to RS232 Ethernet: 1G Port Storage: USB	Fixed single power supply	4 x fixed fans (front-to-back airflow)

Product Specifications

Packet Switch capacity (bidirectional)

- S7314CH-4N-EI: 3000 Gbps
- S7224N-8C: 2800 Gbps
- S7248N-4C-EI: 3200 Gbps
- S7248N-4C-SI: 3200 Gbps
- S7148X-8C-EI: 2560 Gbps
- S7148X-8C-SI: 2560 Gbps
- S7132X16N-4C-EI: 2240Gbps
- S7132X16N-4C-SI: 2240Gbps
- S7124X-8C-EI: 2080 Gbps
- S7124X-8C-SI: 2080 Gbps

Dimensions (W x H x D) without package

- S7314CH-4N-EI : 21.5x4.4x40.8cm
- S7224N-8C : 44.2 x 4.4 x 36cm
- S7248N-4C-EI: 44.2 x 4.4 x 42cm
- S7248N-4C-SI: 44.2 x 4.4 x 42cm
- S7148X-8C-EI: 44.2 x 4.4 x 42cm
- S7148X-8C-SI : 44.2 x 4.5 x 35.5cm
- S7132X16N-4C-EI: 44.2x4.4x42cm
- S7132X16N-4C-SI: 44.2x4.4x35.6cm
- S7124X-8C-EI: 44.2 x 4.4 x 41cm
- S7124X-8C-SI: 44.2 x 4,4 x 35.7cm

Layer 2/Layer 3 Throughput (Gpps)

- S7314CH-4N-EI: 4.46Gpps (bidirectional)
- S7224N-8C : 4.17 Gpps (bidirectional)
- S7248N-4C-EI: 4.76 Gpps (bidirectional)
- S7248N-4C-SI: 4.76 Gpps (bidirectional)
- S7148X-8C-EI: 3.8 Gpps (bidirectional)
- S7148X-8C-SI: 3.8 Gpps (bidirectional)
- S7132X16N-4C-EI: 3.3 Gpps (bidirectional)
- S7132X16N-4C-SI: 3.3 Gpps (bidirectional)
- S7124X-8C-EI: 3.09 Gpps (bidirectional)
- S7124X-8C-SI: 3.09 Gpps (bidirectional)

Weight (Net weight/Gross weight)

- S7314CH-4N-EI : 4.5kg/7kg
- S7224N-8C : 8kg/11.5kg
- S7248N-4C-EI: 8kg/11.5kg
- S7248N-4C-SI: 5.1kg/7.8kg
- S7148X-8C-EI: 8.18kg/10.3kg
- S7148X-8C-SI: 5.56kg/7.66kg
- S7132X16N-4C-EI: 7.5kg/9.7kg
- S7132X16N-4C-SI: 5kg/7.2kg
- S7124X-8C-EI: 5kg/8.5kg
- S7124X-8C-SI: 4.03kg/6.5kg

Product Specifications

Power consumption

Worst case, all ports used, line-rate traffic

- S7314CH-4N-EI : 133W
- S7224N-8C : 130W
- S7248N-4C-EI: 143W
- S7248N-4C-SI: 129.5W
- S7148X-8C-EI: 140.36W
- S7148X-8C-SI: 138.38W
- S7132X16N-4C-EI: 122W
- S7132X16N-4C-SI: 119.68W
- S7124X-8C-EI: 117W
- S7124X-8C-SI: 98.7W

CPU

- Dual-core processor, ARM A53

MTBF

- -EI \geq 90000H
- -SI \geq 70000H

Memory

- eMMC: 8GB on all models
- DRAM: 2GB on all models

Typical power consumption

- S7314CH-4N-EI : 123W
- S7224N-8C : 121W
- S7248N-4C-EI: 132W
- S7248N-4C-SI: 120.1W
- S7148X-8C-EI: 129.14W
- S7148X-8C-SI: 128.26W
- S7132X16N-4C-EI: 110W
- S7132X16N-4C-SI: 108.02W
- S7124X-8C-EI: 105W
- S7124X-8C-SI: 91.74W

Environmental ranges

- Operating temperature: 0°C to 45°C
- Storage temperature: -40°C to 70°C
- Running Humidity: 10% to 90% (No condensation)
- Store Humidity: 5 to 95% (No condensation)

Temperature alarm

- Alarm threshold: 50°C

The S7 Series supports a comprehensive range of management options, including CLI, Web-based, and Cloud-managed platforms. Administrators can utilize SNMP v1/v2/v3, Telnet, and FTP, while security is bolstered by SSH2.0. Additionally, integrated OAM support ensures streamlined operations and more convenient network maintenance.

Cloud management


Leveraging deep expertise in campus and enterprise networking, ETHERNEXION introduces the Cloud Management System (DHCS). By integrating intelligent automation, DHCS streamlines network maintenance, reduces operational costs, and ensures a secure, high-performance environment tailored to evolving user demands.

The platform designed to provide digital solutions for the entire lifecycle of network elements, including switches, routers, and wireless APs:

- **Unified Device Management:** Provides a centralized platform for managing configuration policies, firmware upgrades, and statistical analysis of device operating data.
- **Remote O&M Capabilities:** Utilizing a lightweight reverse proxy (FRP) and an integrated WebTerminal (SSH/Telnet), the system enables secure, cross-network access to intranet devices with latency under 200ms.
- **Automated Deployment & Topology:** Supports Zero-Touch Deployment for large-scale automation. It also uses LLDP to automatically discover and draw intuitive, real-time network topology maps.

- Advanced Monitoring:** Includes a distributed MQTT engine for real-time status reporting (latency <50ms) and a multimodal database architecture (MySQL, InfluxDB, Redis, Elasticsearch) for efficient data analysis and logging.
- Security & Access Control:** Features a multi-level RBAC permission system, high-risk command interception, and WAF protection to block network attacks.

The following is a diagram illustrating cloud-managed ETHERNEXION switches. For more detailed information, please refer to “ETHERNEXION Cloud Controller specification”.

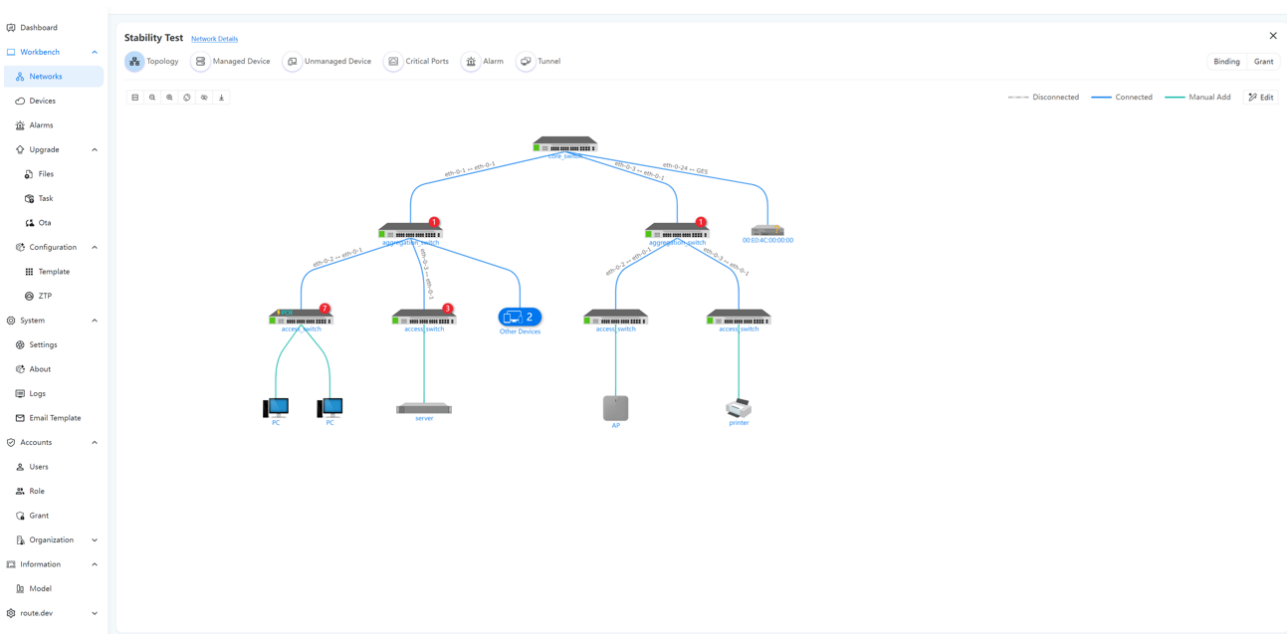

Visual WEB GUI

ENOS allows you to quickly configure common configuration items using a visual WEB GUI, which lowers the application threshold for users.

Device Information

Product ID:	Software:	Hardware Version:	Uptime:
Location:	Image Name: ulmage.h1023a.e680.d	Hardware Version: 1.1	0 days, 6 hours, 42 minutes
WebImage Name:	Serial Number:	EPLD Version: 0.2	Device Name: 5648X
MAC Address: D8-5B-22-00-02-02	Contact:	Contact: --	BootRom Version: v1.0.2

Interface Panel

Legend: Active (Green), Inactive (Grey), Shutdown (Black)

Usage

CPU Usage	7.53%
Memory Usage	36.94%

Temperature


AROUND_CHIP	SWITCH_CHIP
~45°C	~45°C

Fan

Fan 1-1	Fan 1-2	Fan 1-3	Fan 1-4
OK	OK	OK	OK

Software Specifications

ETHERNEXION implements a unified software platform, and the software capabilities supported by the devices are listed in the document [‘ENOS Software features’](#).

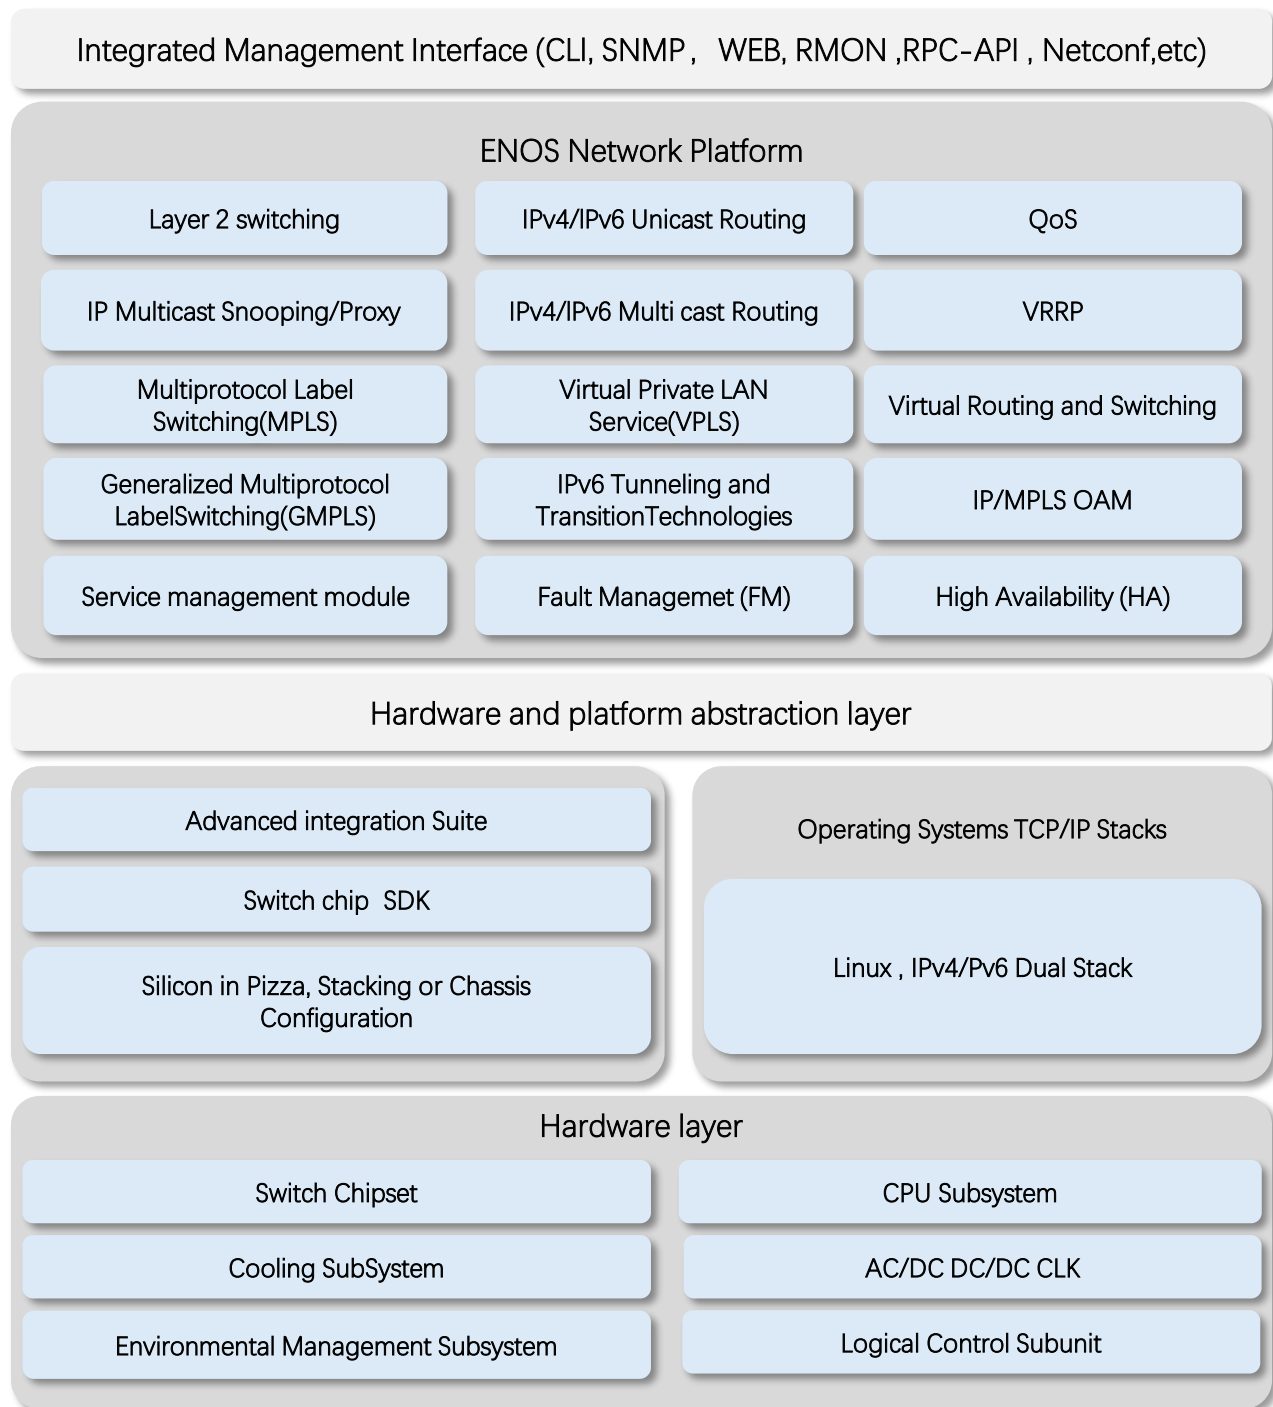

- * All ETHERNEXION switches use a normalized software platform and image package file
- * Unified software version iteration plan
- * Unified user experience

Ordering Information

Items	Description
S7314CH-4N-EI	100G Data Center Switch with 14*100G QSFP28,4*25G SFP28, Dual power supply modules, 2*Intelligent fan modules
S7224N-8C	25G Data Center switch with 24*25G SFP28, 8*100G QSFP28, Dual power supply modules, 2*Intelligent fan modules
S7248N-4C-EI	25G Data Center Switch, with 48*25G SFP28, 4*100G QSFP28, Dual power supply modules(C13), 4*Intelligent fan modules.
S7248N-4C-SI	25G Data Center Switch, with 48*25G SFP28, 4*100G QSFP28, 1*Fixed power supply, 4*Fixed Fans
S7148X-8C-EI	10G Data Center Switch with 48*10G SFP+,8*100G QSFP28, Dual power supply modules, 4*Intelligent fan modules
S7148X-8C-SI	10G Enterprise and Campus Network Switch with 48*10G SFP+, 8*100G QSFP28, Fixed single power supply , 4 Fixed Fans
S7132X16N-4C-EI	10G Data Center Switch with 32*10G SFP+, 16*10G/25G SFP28, 4*100G QSFP28, Dual power supply modules, Intelligent fan modules
S7132X16N-4C-SI	10G Data Center Switch with 32*10G SFP+, 16*10G/25G SFP28, 4*100G QSFP28, Fixed single power supply, 4 Fixed Fans
S7124X-8C-EI	10G Data Center Switch with 24*10G SFP+, 8*100G QSFP28, Dual power supply modules, 2 Intelligent fan modules
S7124X-8C-SI	10G Enterprise and Campus Network Switch with 24*10G SFP+,8*100G QSFP28, Fixed single power supply , 4 Fixed Fans

AC/DC Power Supplies use for all models

Items	Description
PSU-200-AC-AFO	S7 Series 200 W AC power supply (front-to-back airflow)
PSU-350-AC-AFO	S7 Series 350 W AC power supply (front-to-back airflow)
PSU-350-DC-AFO	S7 Series 350W DC power supply (front-to-back airflow)
PSU-550-AC-AFO	S7 Series 550 W AC POE power supply (front-to-back airflow)
PSU-550-DC-AFO	S7 Series 550 W DC POE power supply (front-to-back airflow)

Software Licenses

Items	Description
Software License	MS, L3 enhance features software license key, Preinstalled
Software License	MA, MPLS features software license key

Accessory

Items	Front Mounting	Rear Mounting	Screw	Power Cord	Console (RS232 to RJ45)	Grounding Cable
S7314CH-4N-EI	2	2	14	2	1	1
S7224N-8C	2	2	14	2	1	1
S7248N-4C-EI	2	2	14	2	1	1
S7248N-4C-SI	2	2	14	1	1	1
S7148X-8C-EI	2	2	14	2	1	1
S7148X-8C-SI	2	/	14	1	1	1
S7132X16N-4C-EI	2	2	14	2	1	1
S7132X16N-4C-SI	2	/	14	1	1	1
S7124X-8C-EI	2	2	14	2	1	1
S7124X-8C-SI	2	/	14	1	1	1

About ETHERNEXION:

ETHERNEXION - A technology-oriented company specializing in the development of ethernet switch products. Ethernexion is headquartered in Singapore, with a manufacturing base in Thailand and a business expansion office in India. With the continuous evolution of technology, ETHERNEXION has launched a range of differentiated ethernet switch products. Currently, the company's product line covers a range from 1G to 800G and can be used in scenarios such as enterprise networks, carrier networks, data centers, and AI computing. Currently, the main cooperation model for the company is OEM/ODM, dedicated to providing customers with flexible and end-to-end customized products and technical consulting services. Becoming the most trusted business partner for customers has always been the company's mission and principle.

Contact us:

ETHERNEXION NETWORKS PTE. LTD,

Singapore headquarter:

7500A BEACH ROAD #04-307 THE PLAZA SINGAPORE 199591

Corporate and Sales Email: business@ethernexion.com

Website: www.ethernexion.com

Factories in Thailand:

41/20 moo.8 Bowin,Siracha,Chonburi,Thailand 20230